


Heaters

HT20 Indirect fired Heater

Low noise indirect oil fired heater with a heating capacity of 200 kW. This low-energy machine is ready for use. The machine is mounted in a robust frame and can be moved easily with a forklift or crane.

Technical specifications HT20

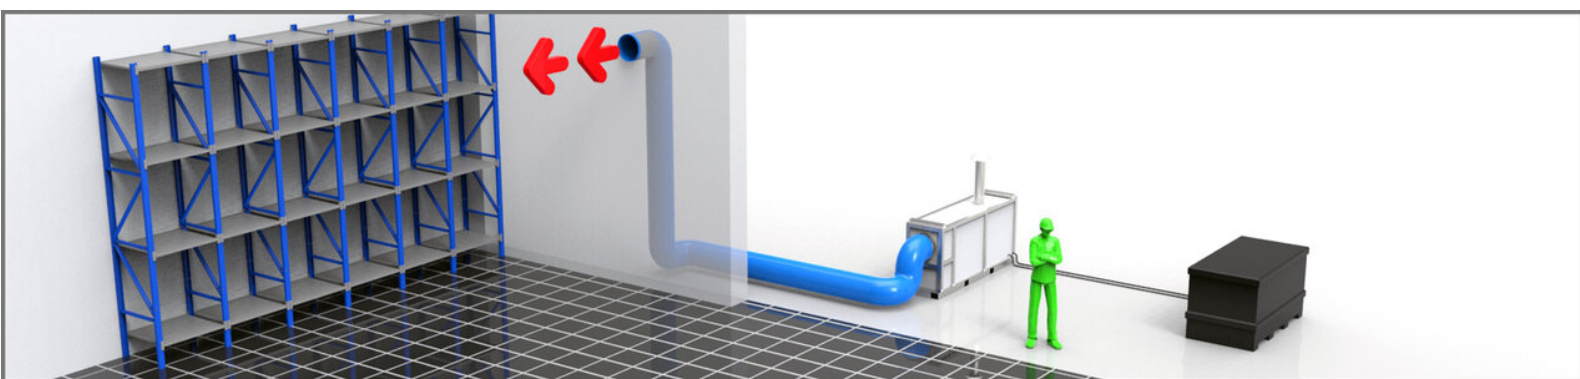

Heating capacity ¹	200 kW	Phases	3 + A	Recommended fuses ³	630 A
Current (nominal) ¹	9 A	Length ²	3000 mm	Standard Cooling Capacity ³	500 kW
Max. air flow ¹	12000 m ³ /h	Width ²	810 mm	Cooling capacity ³	505 kW
External (Air) pressure ¹	600 Pa	Height ²	1360 mm	Sound level (at 10 m) ³	56 dB(A)
Power consumption	232 kW	Nominal pressure drop ³	30 kPa		
Voltage	400 V	Maximum working pressure ³	10 bar		

¹ VK71/VK41 : Maximum heating capacity 200 kW/75 kW

² Maximum heating capacity 75 kW

³ Without top box 1620 x 780 x 1820