## **Coolw®rld**




Industrial boilers

## **OG2000C Industrial boiler**

Gas- or diesel-fired mobile boiler room with a heating capacity of 2,000 kW installed in a robust steel heating container. The powerful and compact unit is easy to install. The mobile industrial boilers provide water temperatures of up to 90 °C and pressures of up to 6 bar. The efficient boiler features various safety facilities, frost protection, low NOx burners, smart control technology and has the lowest emissions, energy consumption and noise levels in the European market.

## Technical specifications **OG2000C**

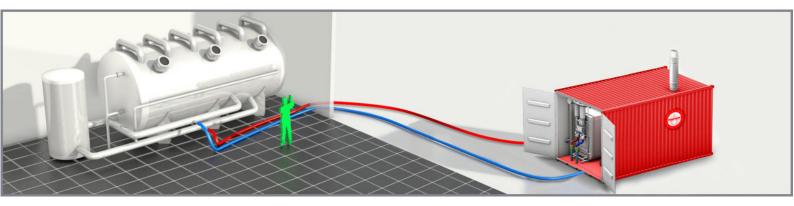

Heating capacity <sup>1</sup>	2000 kW
Voltage <sup>1</sup>	400 V
Internal pump <sup>2</sup>	88.5 m <sup>3</sup> /h
Controller <sup>2</sup>	Digitaal
Volume expansion vessel <sup>2</sup>	720 l

Recommended working pressure <sup>2</sup>	1.6 - 3.0 bar
Safety valve <sup>2</sup>	6 bar
Length <sup>2</sup>	6058 mm
Width <sup>2</sup>	2438 mm
Height <sup>3</sup>	2591 mm

Fuel types <sup>3</sup>	Gas / Diesel
Low NOx class <sup>3</sup>	3
Consumption - oil - full load <sup>3</sup>	182 kg/h
Dimensions (LxWxH) <sup>3</sup>	6058 x 2438 x 2735 mm
Weight <sup>3</sup>	9000 kg

<sup>&</sup>lt;sup>1</sup> Electrical elements

<sup>&</sup>lt;sup>2</sup> Maximum heating capacity 75 kW

 $<sup>^3</sup>$  Without top box 1620 x 780 x 1820