




## Chillers

### CH05 Chiller

Air-cooled chiller with 50 kW cooling capacity, complete with internal water pump and buffer tank. This low-energy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a forklift or crane.

#### Technical specifications CH05

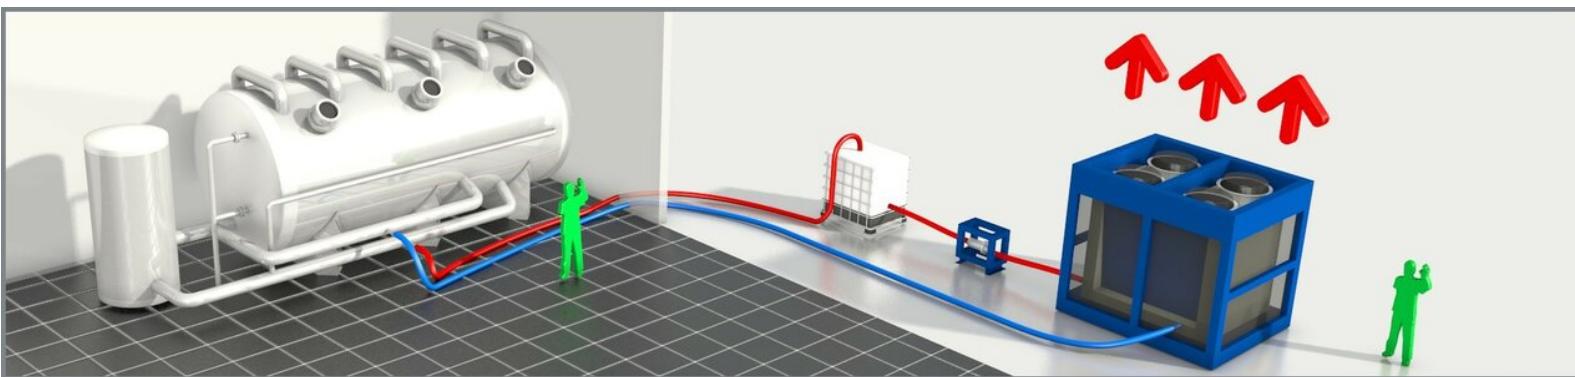

Cooling capacity <sup>1</sup>	50.7 kW	Phases <sup>2</sup>	3 + N + A	Width <sup>2</sup>	1280 mm
Power consumption <sup>1</sup>	17.4 kW	Internal pump <sup>2</sup>	Ja	Height <sup>3</sup>	2260 mm
Current (nominal) <sup>1</sup>	38 A	Maximum working pressure <sup>2</sup>	4 bar	Weight <sup>3</sup>	1825 kg
Voltage <sup>2</sup>	400 V	Nominal pressure drop <sup>2</sup>	30 kPa	Sound level (at 10 m) <sup>3</sup>	53 dB(A)
Recommended fuses <sup>2</sup>	63 A	Length <sup>2</sup>	3260 mm		

<sup>1</sup> According to Eurovent specifications (cooling: water 12 °C/7 °C, air 35 °C)

<sup>2</sup> When additional reheating is utilised

<sup>3</sup> Without top box 1620 x 780 x 1820