




Cold stores

KC03 Cold storage cell

Ready-for-use mobile cold storage cell with a volume of 10 m³ and a large refrigeration capacity (overcapacity). The cold storage cell has been fitted with a flat anti-skid floor, lighting, a door that opens smoothly (also from the inside), and has a very low entry height. The cold storage cell meets the HACCP/GMP requirements and is easy to install, even in locations that are difficult to reach, as well indoors as outdoors. The storage cell is low noise and low power.

Technical specifications KC03

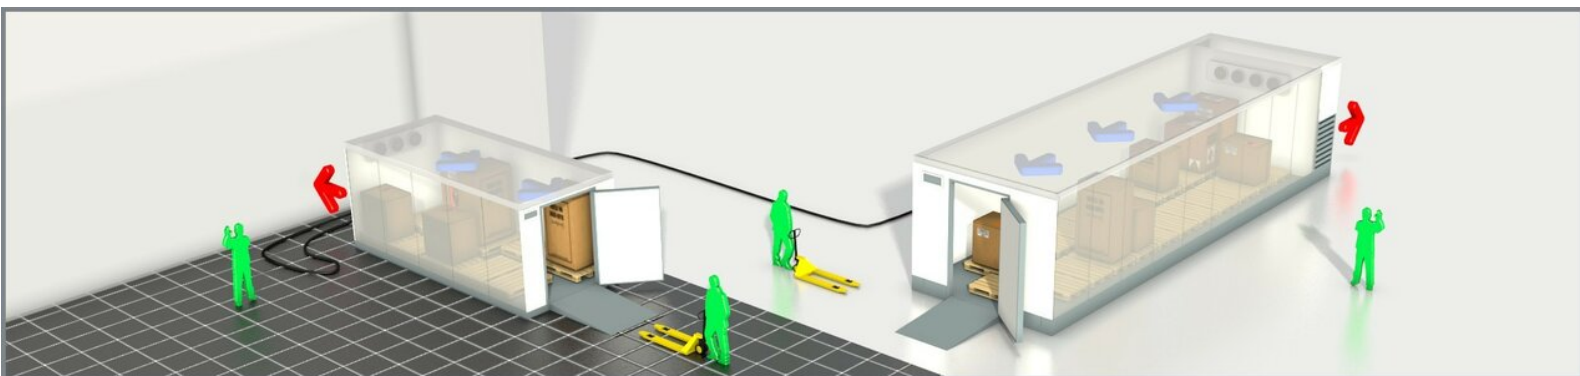

Amount of pallets (euro) ¹	3	Current (nominal) ³	4.7 A	Width (internal) ³	2340 mm
Min. inside temperature ²	-2 °C	Recommended fuses ³	16 A	Height (internal) ³	2260 mm
Max. inside temperature ²	10 °C	Phases ³	1 + N + A	Door height ³	2100 mm
Min. outside temperature ²	-20 °C	Length (external) ³	2000 mm	Door width ³	900 mm
Max. outside temperature ²	35 °C	Width (external) ³	2500 mm	Weight ³	750 kg
Voltage ¹	230 V	Height (external) ³	2500 mm	Sound level (at 10 m) ³	38 dB(A)
Current (max) ³	7.2 A	Length (internal) ³	1840 mm		

¹ When additional reheating is utilised

² After approval of Coolworld International

³ With electrical heating