## Coolworld




Cold stores

## **MK02** Cold storage cell

Ready-for-use mobile cold storage cell with a volume of 84 m<sup>3</sup> and a large refrigeration capacity (overcapacity). The cold storage cell has been fitted with a flat anti-skid floor, lighting, a door that opens smoothly (also from the inside), and has a very low entry height. The cold storage cell meets the HACCP/GMP requirements, and standard features include a data log system. The unit is easy to install with a crane truck. The storage cell is low noise and low power.

## Technical specifications MK02

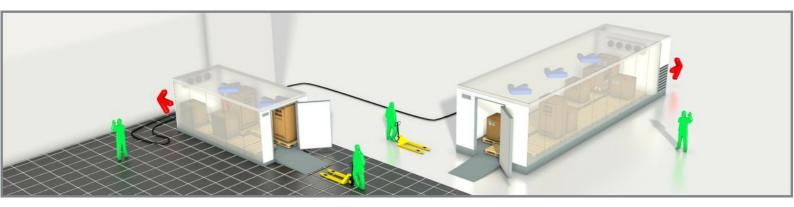

Amount of pallets (euro) 1	28
Min. inside temperature <sup>2</sup>	-2 °C
Max. inside temperature <sup>2</sup>	10 °C
Min. outside temperature <sup>2</sup>	-20 °C
Max. outside temperature <sup>2</sup>	36 °C
Voltage <sup>3</sup>	400 V
Current (max) 1	8.1 A

Current (nominal) 1	7.5 A
Recommended fuses <sup>1</sup>	16 A
Phases <sup>1</sup>	3 + N + A
Length (external) 1	12000 mm
Width (external) 1	3500 mm
Height (external) 1	3000 mm
Length (internal) <sup>1</sup>	10500 mm

Width (internal) <sup>1</sup>	3200 mm
Height (internal) <sup>1</sup>	2700 mm
Door height <sup>1</sup>	2500 mm
Door width <sup>1</sup>	2000 mm
Weight <sup>1</sup>	6000 kg
Sound level (at 10 m) $^{\rm 1}$	47 dB(A)

<sup>&</sup>lt;sup>1</sup> With electrical heating

<sup>&</sup>lt;sup>2</sup> After approval of Coolworld International

<sup>&</sup>lt;sup>3</sup> When additional reheating is utilised