




## Freezer rooms

### VC03 Freezer unit

Ready-for-use mobile freezer unit with a volume of 30 m<sup>3</sup> and a large freezing overcapacity (temperature range down to minus 30 °C). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements and is easy to install, even in locations that are difficult to reach, as well indoors as outdoors. The storage cell is low noise and low power.

#### Technical specifications **VC03**

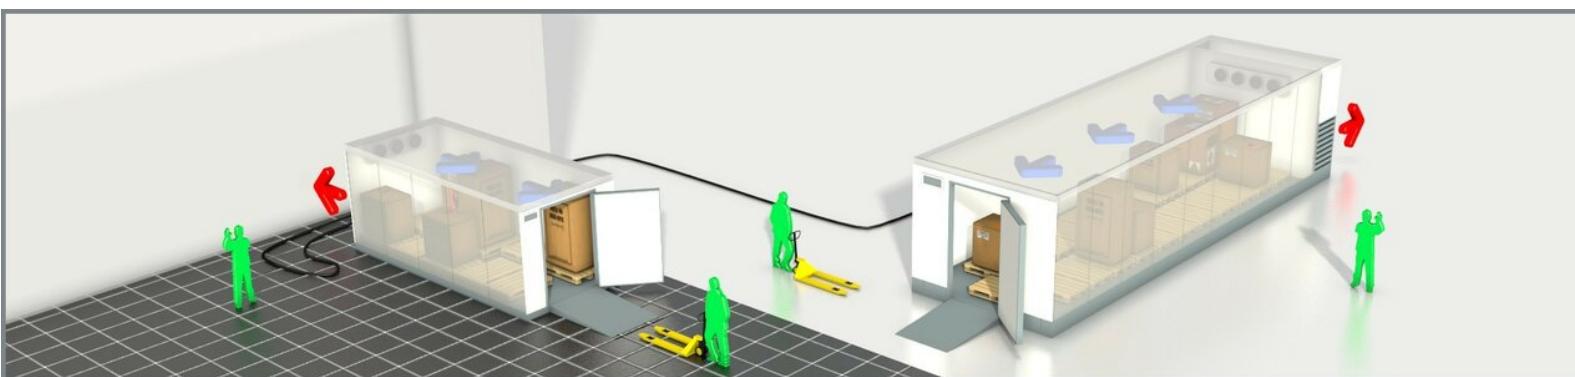

Amount of pallets (euro) <sup>1</sup>	3	Current (nominal) <sup>1</sup>	3.64 A	Width (internal) <sup>1</sup>	2340 mm
Min. inside temperature <sup>2</sup>	-25 °C	Recommended fuses <sup>1</sup>	16 A	Height (internal) <sup>1</sup>	2260 mm
Max. inside temperature <sup>2</sup>	-10 °C	Phases <sup>1</sup>	3 + N + A	Door height <sup>1</sup>	2100 mm
Min. outside temperature <sup>2</sup>	-20 °C	Length (external) <sup>1</sup>	2000 mm	Door width <sup>1</sup>	900 mm
Max. outside temperature <sup>2</sup>	35 °C	Width (external) <sup>1</sup>	2500 mm	Weight <sup>1</sup>	850 kg
Voltage <sup>3</sup>	400 V	Height (external) <sup>1</sup>	2500 mm	Sound level (at 10 m) <sup>1</sup>	47 dB(A)
Current (max) <sup>1</sup>	5.43 A	Length (internal) <sup>1</sup>	1840 mm		

<sup>1</sup> With electrical heating

<sup>2</sup> After approval of Coolworld International

<sup>3</sup> When additional reheating is utilised