




Freezer rooms

VC04 Freezer unit

Ready-for-use mobile freezer unit with a volume of 20 m³ and a large freezing overcapacity (temperature range down to minus 30 °C*). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements and is easy to install, even in locations that are difficult to reach, as well indoors as outdoors. The storage cell is low noise and low power.

Technical specifications **VC04**

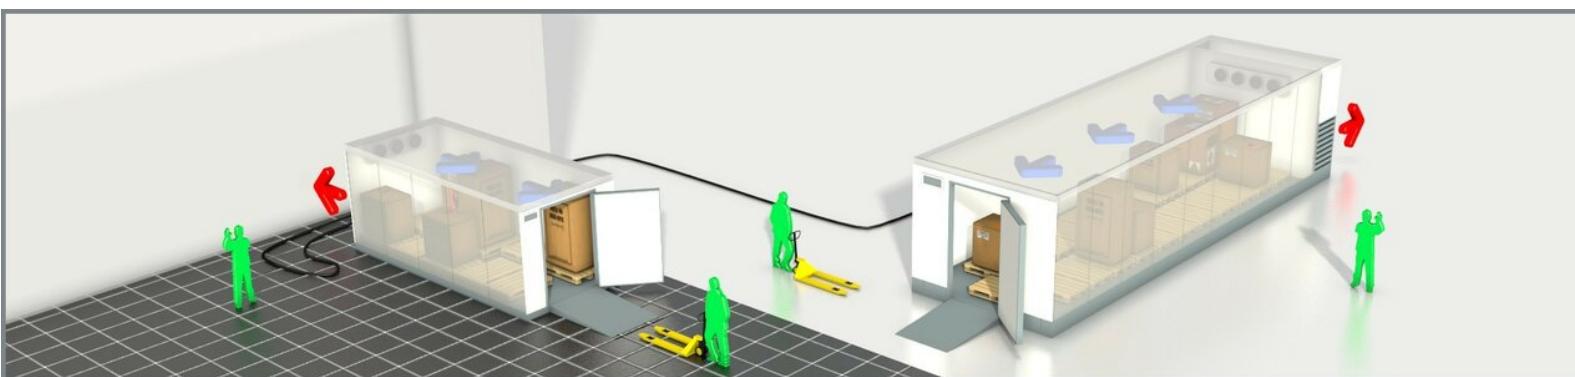

Amount of pallets (euro) ¹	5	Current (nominal) ¹	4.8 A	Width (internal) ¹	2340 mm
Min. inside temperature ²	-30 °C	Recommended fuses ¹	16 A	Height (internal) ¹	2260 mm
Max. inside temperature ²	-10 °C	Phases ¹	3 + N + A	Door height ¹	2100 mm
Min. outside temperature ²	-20 °C	Length (external) ¹	4000 mm	Door width ¹	900 mm
Max. outside temperature ²	43 °C	Width (external) ¹	2500 mm	Weight ¹	1350 kg
Voltage ³	400 V	Height (external) ¹	2500 mm	Sound level (at 10 m) ¹	48 dB(A)
Current (max) ¹	6.9 A	Length (internal) ¹	3840 mm		

¹ With electrical heating

² After approval of Coolworld International

³ When additional reheating is utilised