




Mobile airco's

AS03 Water-cooled mobile air-conditioner (split system)

Presentable, whisper-silent mobile air conditioner with a 6.6 kW cooling capacity. Despite its high cooling capacity, it only requires a 230 V power supply. The unit is ready for use and features a condenser unit that must be installed outside the cooling space for heat drain. (split system).

Technical specifications AS03

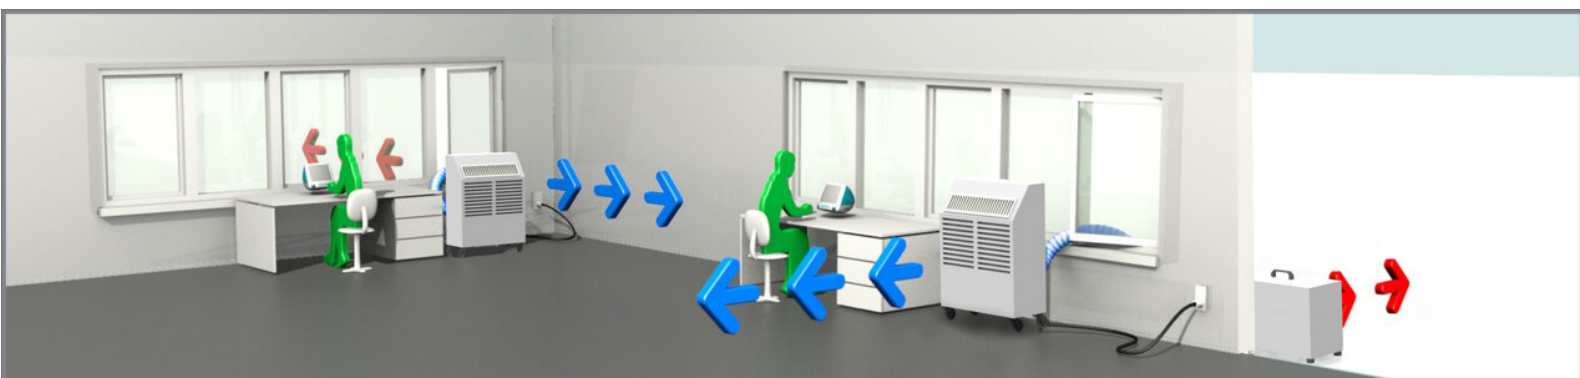

Cooling capacity ¹	6.6 kW	Length (external) ²	582 mm	Sndlvl inside min (at 1 m) ²	56 dB(A)
Power consumption ¹	2.4 kW	Width (external) ²	360 mm	Max. outside temperature ²	40 °C
Current (nominal) ¹	12 A	Height (external) ²	460 mm	Min. outside temperature ²	20 °C
Voltage ²	230 V	Length (internal) ²	815 mm	Max. inside temperature ²	30 °C
Recommended fuses ²	16 A	Width (internal) ²	360 mm	Min. inside temperature ³	18 °C
Phases ²	1 + N + A	Height (internal) ²	1030 mm	Current (max) ³	13 A
Connection hose (diameter) ²	70 mm	Weight indoor unit ²	86 kg	Sndlvl inside min (at 10 m) ³	35 dB(A)
Connection hose (length) ²	0 m	Weight outdoor unit ²	16.5 kg		

¹ Cooling: Water-Glycol 30% -10°C/-6°C, air 0° 60% RV

² When additional reheating is utilised

³ After approval of Coolworld International