




Ultra low freezers

MU02 Ultra-low freezer unit

Representative, low-energy and lownoise cell constructed in accordance with HACCP & GMP requirements, with a volume of 71 m³. Especially developed for ultra-low temperatures down to minus 45 °C with a complete back-up cooling system. Ready for use and easy to install with a crane truck, even in locations that are difficult to reach. Can be used both outdoors and indoors. Uses ozone-friendly cooling agent. Accessible via door that can also be opened from the inside. Including lighting and door frame heating.

Technical specifications MU02

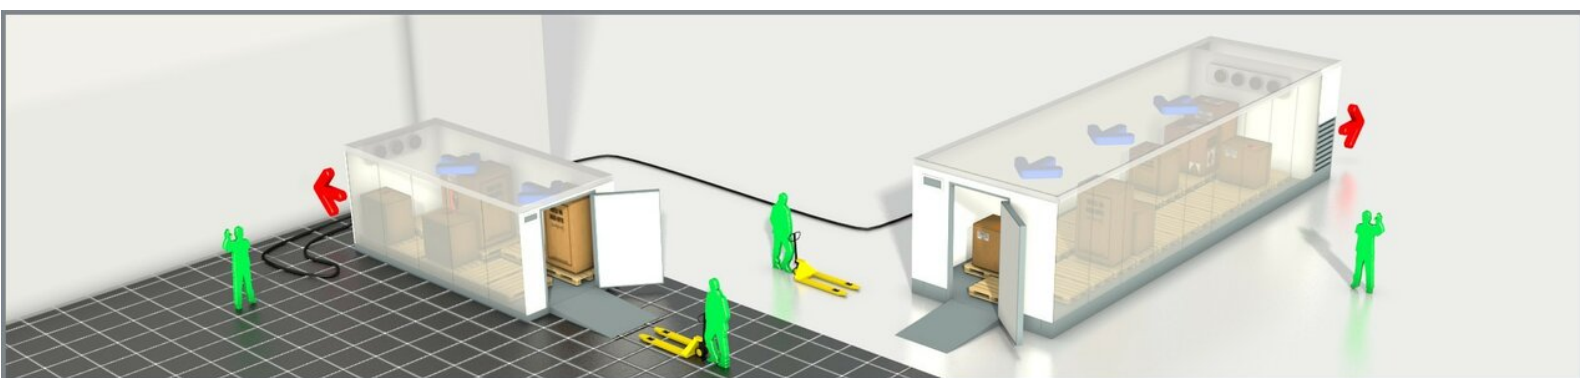

Amount of pallets (euro)	24	Current (nominal) ¹	28.2 A	Width (internal) ¹	3140 mm
Min. inside temperature ¹	-45 °C	Recommended fuses ¹	2 x 63 A	Height (internal) ¹	2520 mm
Max. inside temperature ¹	-20 °C	Phases ¹	3 + N + A	Door height ¹	2100 mm
Min. outside temperature ¹	-20 °C	Length (external) ¹	12000 mm	Door width ¹	1400 mm
Max. outside temperature ¹	37 °C	Width (external) ¹	3500 mm	Weight ¹	9500 kg
Voltage ¹	400 V	Height (external) ¹	3000 mm	Sound level (at 10 m) ¹	61 dB(A)
Current (max) ¹	41.8 A	Length (internal) ¹	8900 mm		

¹ After approval of Coolworld International