




Shockfreezers

MI02 Shock freezer / Blast chiller

Representative, low-energy and low-noise cell constructed in accordance with HACCP & GMP requirements, with a volume of 60 m³. Especially developed for shock freezing / blast chilling of products. Ready for use and easy to install with a crane truck, even in locations that are difficult to reach. Can be used both outdoors and indoors. Uses ozone-friendly cooling agent. Accessible via door that can also be opened from the inside. Including lighting.

Technical specifications MI02

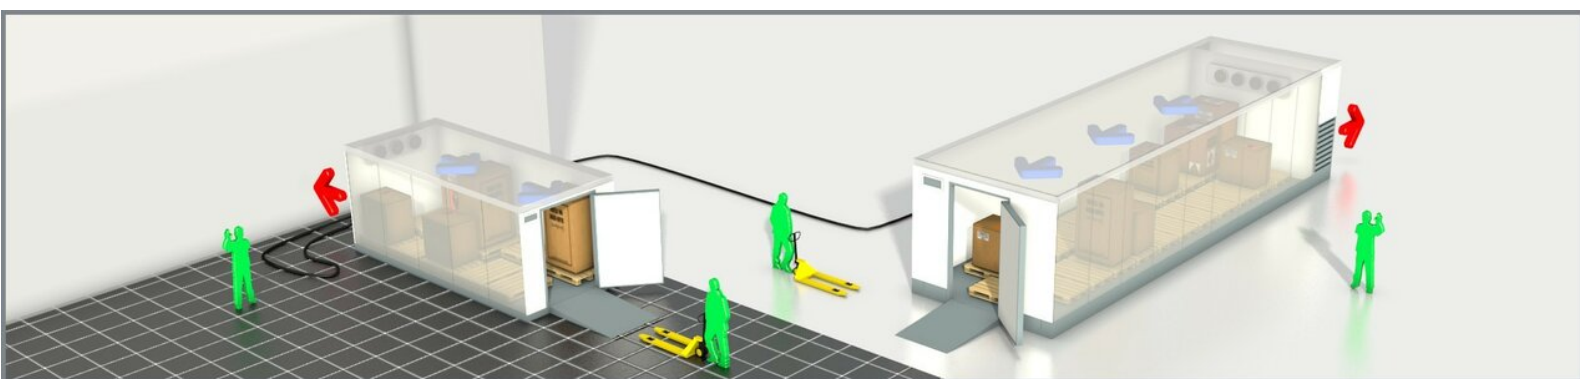

Amount of pallets (euro)	23	Recommended fuses ¹	250 A	Height (internal) ¹	2150 mm
Min. inside temperature ¹	-35 °C	Phases ¹	3 + N + A	Door height ¹	2100 mm
Max. inside temperature ¹	5 °C	Dimensions (LxWxH) ¹	12000x3500x8800 mm	Door width ¹	1400 mm
Min. outside temperature ¹	-20 °C	Length (external) ¹	12000 mm	Weight ¹	10100 kg
Max. outside temperature ¹	37 °C	Width (external) ¹	3500 mm	Sound level (at 10 m) ¹	62 dB(A)
Voltage	400 V	Height (external) ¹	3400 mm	Internal dimensions (LxWxH) ¹	8800x3100x2150 mm
Current (max) ¹	213.7 A	Length (internal) ¹	8800 mm		
Current (nominal) ¹	137 A	Width (internal) ¹	3100 mm		

¹ After approval of Coolworld International