




Cold stores

## MK01 Cold storage cell

Ready-for-use mobile cold storage cell with a volume of 84 m<sup>3</sup> and a large refrigeration capacity (overcapacity). The cold storage cell has been fitted with a flat anti-skid floor, lighting, a door that opens smoothly (also from the inside), and has a very low entry height. The cold storage cell meets the HACCP/GMP requirements, and standard features include a data log system. The unit is easy to install with a crane truck. The storage cell is low noise and low power.

### Technical specifications MK01

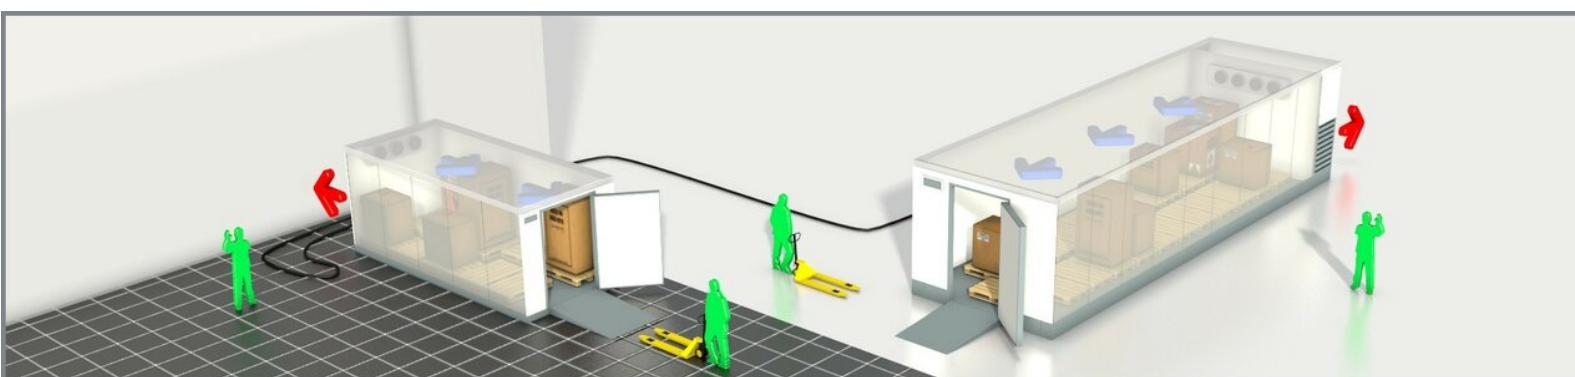

Amount of pallets (euro)	26	Current (nominal) <sup>3</sup>	6.9 A	Width (internal) <sup>3</sup>	2700 mm
Min. inside temperature <sup>1</sup>	-2 °C	Recommended fuses <sup>3</sup>	16 A	Height (internal) <sup>3</sup>	2700 mm
Max. inside temperature <sup>1</sup>	10 °C	Phases <sup>3</sup>	3 + N + A	Door height <sup>3</sup>	2500 mm
Min. outside temperature <sup>1</sup>	-20 °C	Length (external) <sup>3</sup>	12000 mm	Door width <sup>3</sup>	1400 mm
Max. outside temperature <sup>1</sup>	43 °C	Width (external) <sup>3</sup>	3000 mm	Weight <sup>3</sup>	5800 kg
Voltage <sup>2</sup>	400 V	Height (external) <sup>3</sup>	3000 mm	Sound level (at 10 m) <sup>3</sup>	50 dB(A)
Current (max) <sup>3</sup>	7.8 A	Length (internal) <sup>3</sup>	10500 mm		

<sup>1</sup> After approval of Coolworld International

<sup>2</sup> When additional reheating is utilised

<sup>3</sup> With electrical heating

