Coolw®rld




Freezer rooms

MV01 Freezer unit

Ready-for-use mobile freezer unit with a volume of 84 m³ and a large freezing overcapacity (temperature range down to minus 35 °C*). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements, and standard features include a data log system. Optional are wireless temperature control and monitoring. The unit is easy to install with a crane truck. This storage cell is low noise and low energy.

Technical specifications MV01

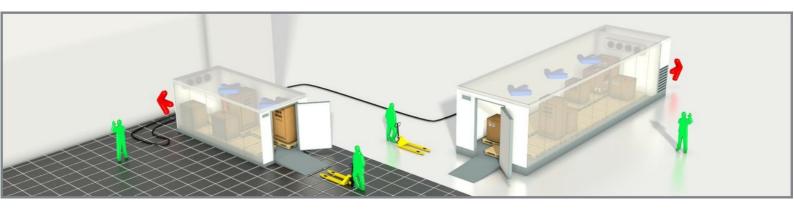

Amount of pallets (euro) 1	26
Min. inside temperature ²	-35 °C
Max. inside temperature ²	2°C
Min. outside temperature ²	-20 °C
Max. outside temperature ²	43 °C
Voltage ¹	400 V
Current (max) ³	21 A

Current (nominal) ³	14.8 A
Recommended fuses ³	25 A
Phases ³	3 + N + A
Length (external) ³	12000 mm
Width (external) ³	3000 mm
Height (external) ³	3000 mm
Length (internal) ³	10500 mm

Width (internal) ³	2700 mm
Height (internal) ³	2700 mm
Door height ³	2500 mm
Door width ³	1400 mm
Weight ³	6200 kg
Sound level (at 10 m) $^{\rm 3}$	50 dB(A)

¹ When additional reheating is utilised

 $^{^{2}\,}$ After approval of Coolworld International

³ With electrical heating