




Shockfreezers

MI01 Freezer unit

Representative, low-energy and low-noise cell constructed in accordance with HACCP & GMP requirements, with a volume of 25 m³. Especially developed for shock freezing / blast chilling of products. Ready for use and easy to install with a crane truck, even in locations that are difficult to reach. Can be used both outdoors and indoors. Uses ozone-friendly cooling agent. Accessible via door that can also be opened from the inside. Including lighting.

Technical specifications MI01

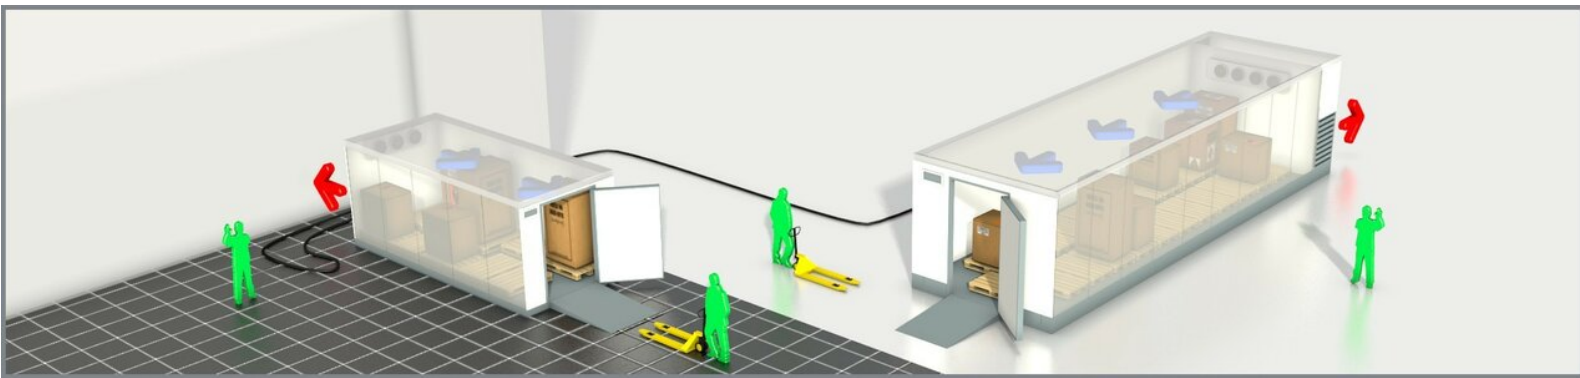

Amount of pallets (euro) ¹	10	Current (nominal) ¹	41.7 A	Width (internal) ¹	2700 mm
Min. inside temperature ²	-35 °C	Recommended fuses ¹	63 A	Height (internal) ¹	1970 mm
Max. inside temperature ²	5 °C	Phases ¹	3 + N + A	Door height ¹	2100 mm
Min. outside temperature ²	-20 °C	Length (external) ¹	6450 mm	Door width ¹	1400 mm
Max. outside temperature ²	37 °C	Width (external) ¹	2950 mm	Weight ¹	3100 kg
Voltage ³	400 V	Height (external) ¹	2930 mm	Sound level (at 10 m) ¹	59 dB(A)
Current (max) ¹	59.2 A	Length (internal) ¹	4700 mm		

¹ With electrical heating

² After approval of Coolworld International

³ When additional reheating is utilised